

FRF-129 DATA SHEET

DESCRIPTION


FRF-129: High efficiency dual polarized L1/L2 GPS antenna. Supports both L1 and L2

(1575 MHz, 1227 MHz). Two SMA outputs for Right Hand Circular and Left Hand Circular (RHCP/LHCP)

PERFORMANCE

Swept boresite gain versus frequency.

Gain vs. Frequency

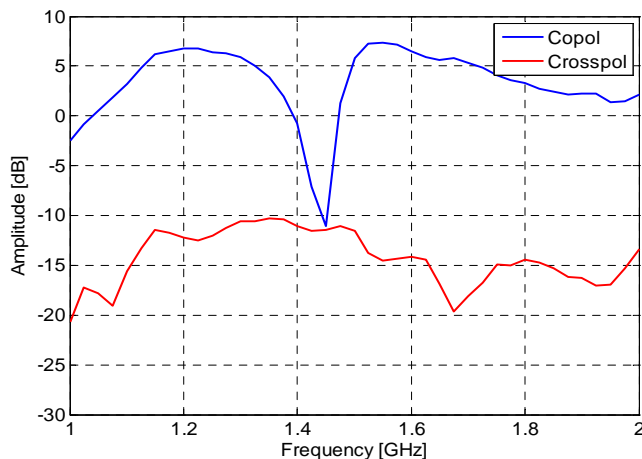

SPECIFICATIONS

Frequency	1227 ±12 MHz; 1575 ±12 MHz
Gain:	7 dBiC
VSWR	1.5
Pattern	Hemispherical/patch
Polarization	Dual RHCP / LHCP
Power	5 Watts
Connector	SMA
Weight	0.5 pounds
Height	5" x 5" x 1: deep
Finish	Anodized aluminum